

Aurum[®]


Bronze Spring Relief Safety Valve (Angle Type)

Cat. No.: AU-SVA16

Test Pressure Hydraulic

Set Pressure : 50psi

Temp. Range : 10°C to 225°C

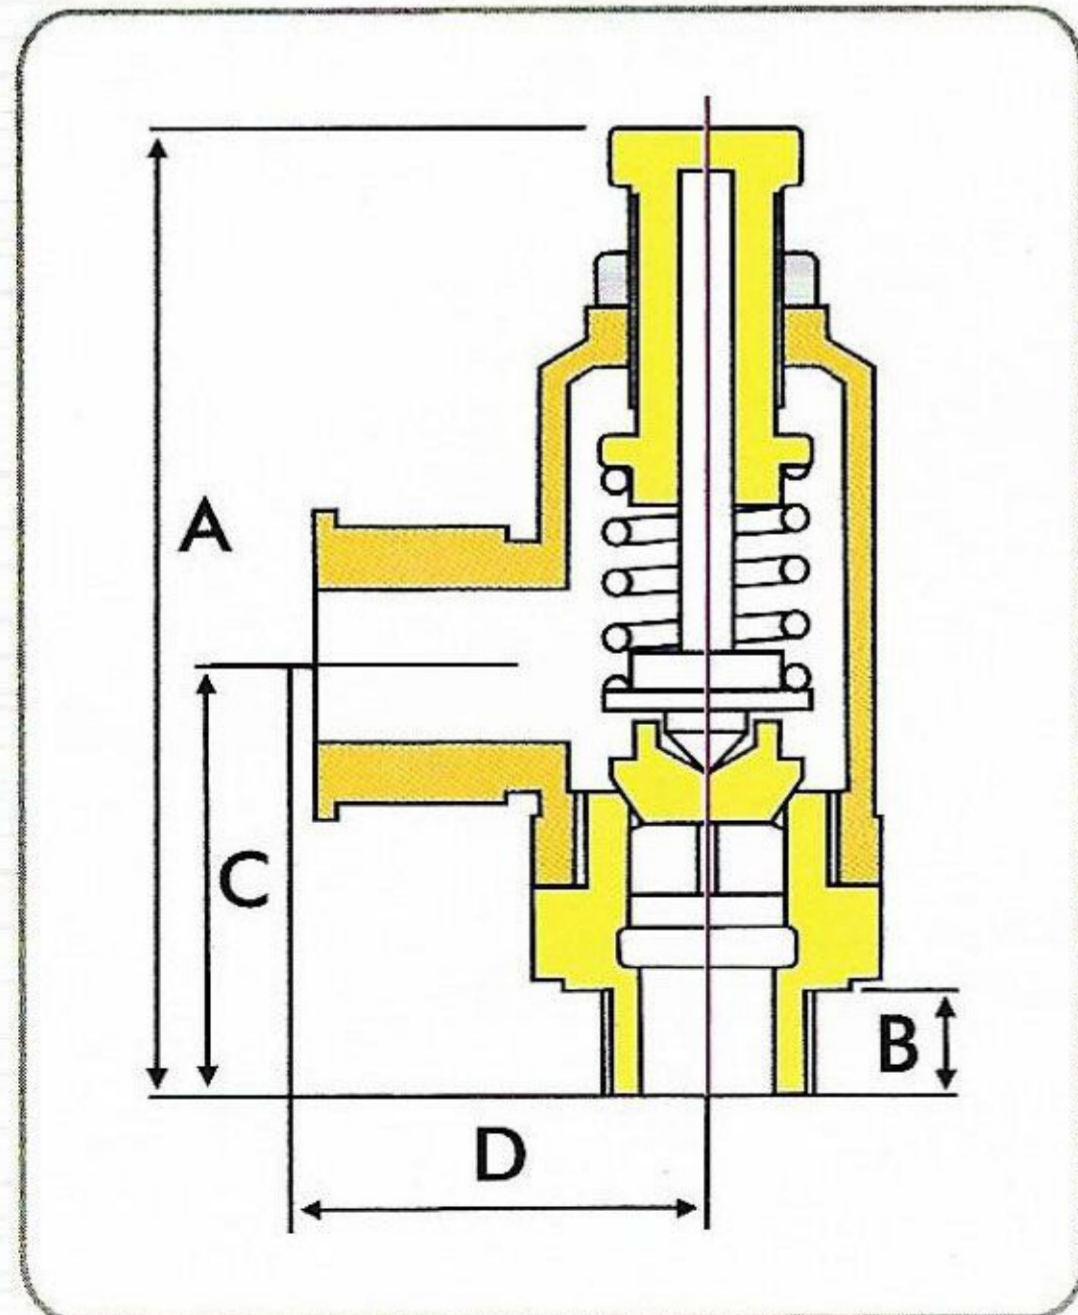

SALIENT FEATURES :

- ✓ Screwed Male BSP at Inlet and Screwed Female BSP at outlet.
- ✓ Enclosed Side Discharge at right angle.
- ✓ Chrome plated spring made from spring steel.
- ✓ Discharges steam above set pressure.
- ✓ Provided with adjustable bolt to set blow-down pressure.
- ✓ Reliable with trouble free performance.
- ✓ Size range from 15mm to 50mm.

UTILITY

WATER	AIR	STEAM	OIL	GASES
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DIMENSIONS

Inches	mm	A	B	C	D
1/2	15	150	19	56	36
3/4	20	166	22	66	41
1	25	178	18	70	45
1¼	32	182	22	72	47
1½	40	217	23	94	57
2	50	242	24	100	70

MATERIAL :

Description	Material	Specifications
Adjusting Screw	Bronze	IS : 318 Gr. LTB2
Locking Nut	Bronze	IS : 318 Gr. LTB2
Spring Chamber	Bronze	IS : 318 Gr. LTB2
Spring Disc	Bronze	IS : 318 Gr. LTB2
Spring	Carbon Steel	EN 44
Stem	Bronze	IS : 318 Gr. LTB2
Disc	Bronze	IS : 318 Gr. LTB2
Body	Bronze	IS : 318 Gr. LTB2

