

Aurum[®]

Stainless Steel Ball Valve Screwed Ends

Cat. No.: AU-IBS28

Test Pressure Hydraulic

Body & Seat : 1000psi


Temp. Range : 10°c to 225°c

SALIENT FEATURES :


- ✓ Screwed Female Ends to IS:554 BSP.
- ✓ Quarter turn, smooth lever operation.
- ✓ Investment Casted Body & Plug in CF8 (AISI 304).
- ✓ All working parts made up of AISI 304.
- ✓ Also available in CF8M (AISI 316).
- ✓ Blow out proof Stem.
- ✓ Best quality P.T.FE. seating & asbestos packing.
- ✓ Suitable for chemical lines.

UTILITY

WATER	AIR	STEAM	OIL	GASES
✓	✓	✓	✓	✓

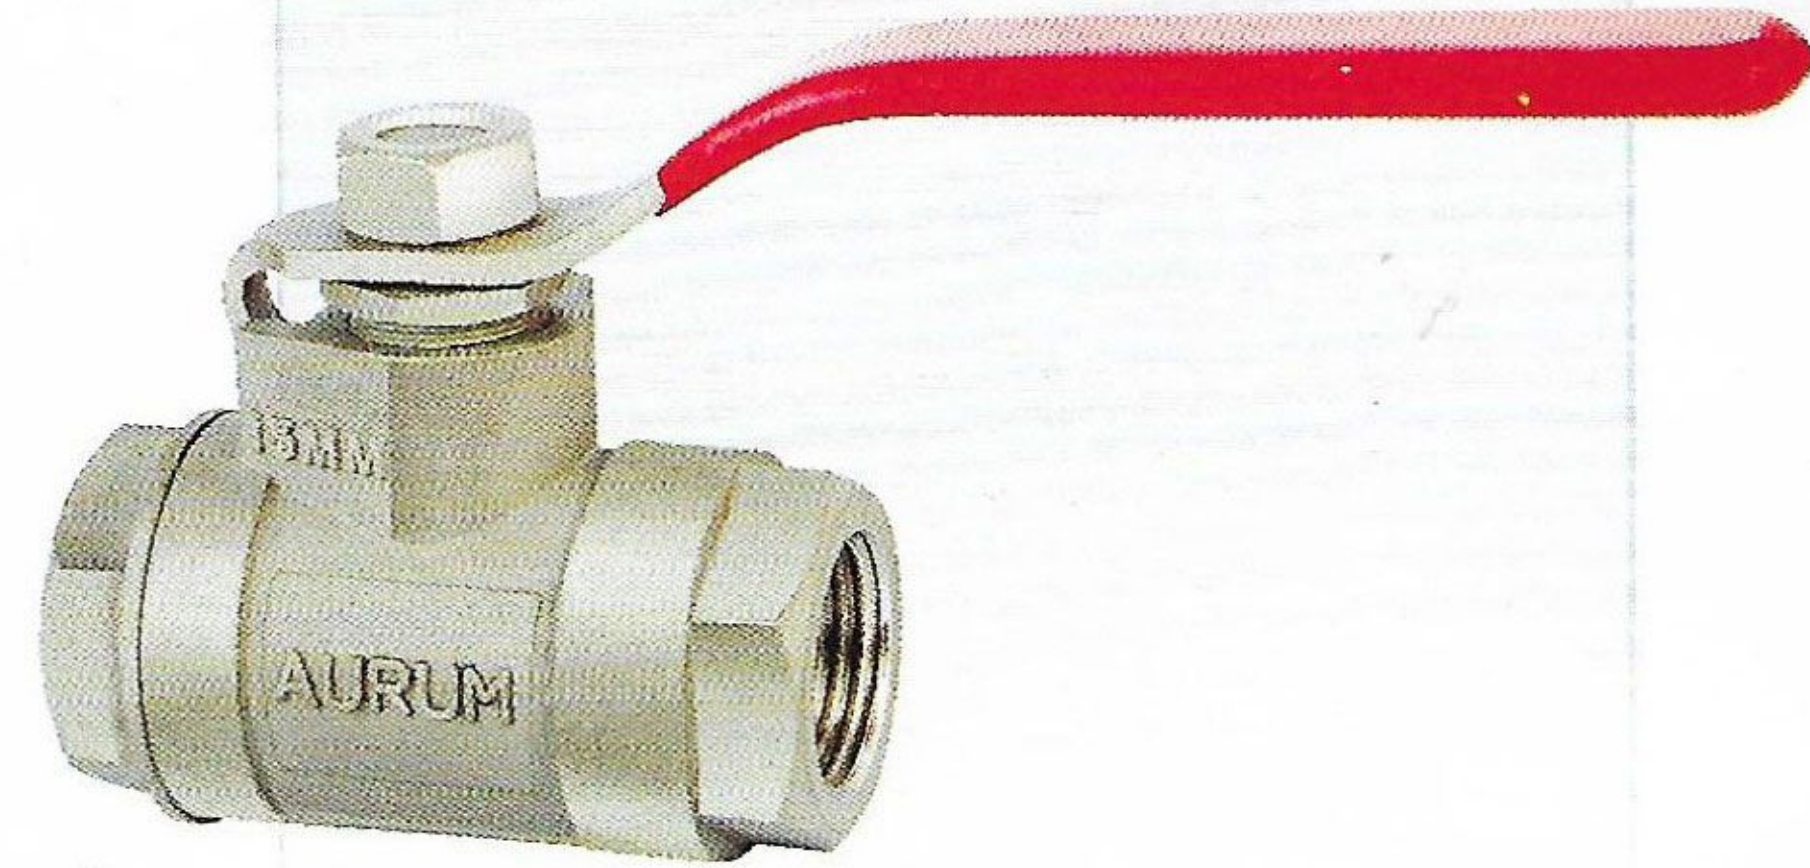

DIMENSIONS

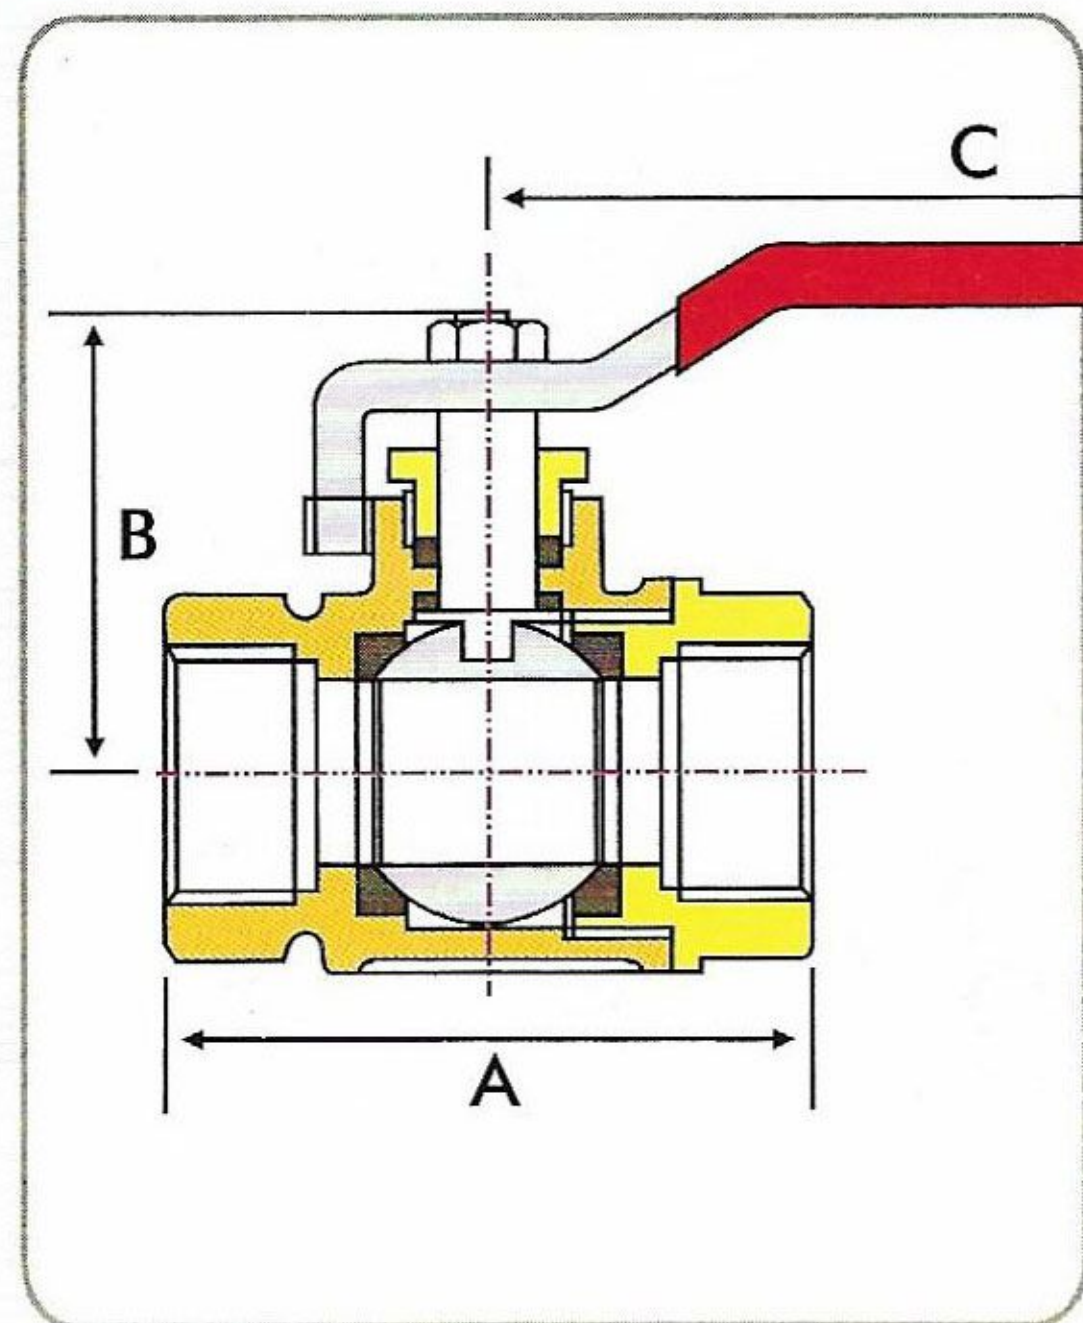

Inches	mm	A	B	C
1/2	15	65	50	110
3/4	20	75	55	110
1	25	85	60	135
1¼	32	95	75	170
1½	40	105	95	220
2	50	125	100	260

MATERIAL :

Description	Material	Specifications
Lever Nut	S.S.	AISI 304
Gland	Brass	IS : 6912 Gr. FLB
Gland Packing Ring	Teflon/Asbestos	IS : 4687
Body	S.S.	CF 8 AISI 304
Ball Seals	Teflon	---
Ball	S.S.	CF 8 AISI 304
Stem	S.S.	AISI410
Body Connector	S.S.	CF 8 AISI 304
Lever	S.S.	AISI 304