

Aurum[®]

Gun Metal Globe Valve No.-9 Union Bonnet Flanged Ends

Cat. No.: AU-UF10

Test Pressure Hydraulic

Body & Seat : 500psi


Temp. Range : 10°c to 225°c

SALIENT FEATURES :

- ✓ Flanged Ends to IS:778
- ✓ AISI 410 working parts from extruded rods
- ✓ Rising spindle, Screwed-On Bonnet(2 piece)
- ✓ Smooth Handwheel operation
- ✓ Renewable Seat and ring
- ✓ High Quality Gland Packing suitable for Steam
- ✓ Also Available in PTFE & Rubber Seat.
- ✓ Size range from 15mm to 100mm

UTILITY

WATER	AIR	STEAM	OIL	GASES
✓	✓	✓	✓	✗

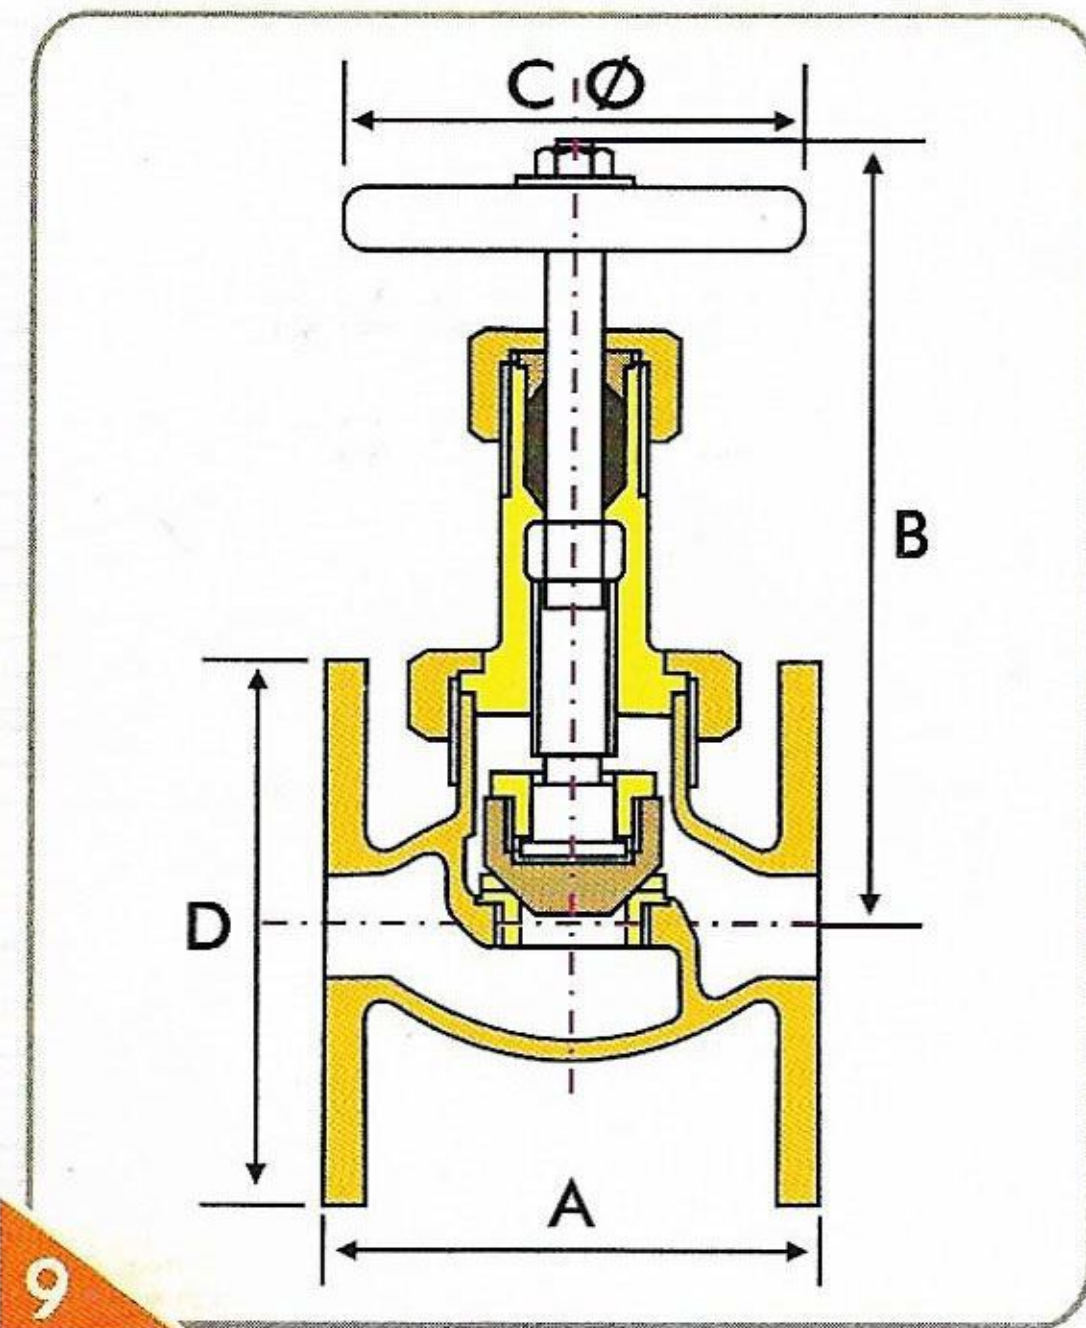

DIMENSIONS

Inches	mm	A	B	C	D
1/2	15	80	126	68	95
3/4	20	95	133	68	105
1	25	115	139	82	115
1¼	32	130	157	82	140
1½	40	145	183	107	150
2	50	170	192	107	165
2½	65	205	229	115	185
3	80	225	253	130	200

MATERIAL :

Description	Material	Specifications
Handwheel Nut	M.S.	IS : 1367
Washer	M.S.	IS : 226
Handwheel	C.I.	IS : 210 Gr. FG200
Stem	13% Cr. S.S.	ASTM A182 Gr.F6a/AISI-410
Gland, Gland Nut	Leaded tin Bronze	IS : 318 Gr. LTB2
Bonnet, Disc Nut	Leaded tin Bronze	IS : 318 Gr. LTB2
Disc	13% Cr. S.S.	ASTM A182 Gr.F6a/AISI-410
Body	Leaded tin Bronze	IS : 318 Gr. LTB2
Body Seat Ring	13% Cr. S.S.	ASTM A182 Gr.F6a/AISI-410
Gland Packing	Asbestos	Graphited
Union Nut	Leaded tin Bronze	IS : 318 Gr. LTB2