

## DIMENSIONS

Inches	1/2	3/4	1	1 <sup>1/4</sup>	1 <sup>1/2</sup>	2
mm	15	20	25	32	40	50
A	72	87	102	116	125	150
B	130	141	148	169	185	208
C	59	59	68	83	91	99

## MATERIAL


Description	Material	Specifications
Handwheel Nut	M.S.	IS : 1367
Washer	M.S.	IS : 226
Handwheel	C.I.	IS : 210 Gr. FG200
Gland, Gland Nut	Bronze	LTB2 of IS : 318
Stem & Disc	13% Cr. S.S.	
Bonnet & Disc Nut	Bronze	LTB2 of IS : 318
Body	Bronze	LTB2 of IS : 318
Body Seat Ring	13% Cr. S.S.	
Gland Packing	Asbestos	IS : 4687
Union Nut	Bronze	LTB2 of IS : 318

### Test Pressure Hydraulic

Body & Seat : 300psi

Temp. Range : 10°C to 225°C

UTILITY				
WATER	AIR	STEAM	OIL	GASES
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

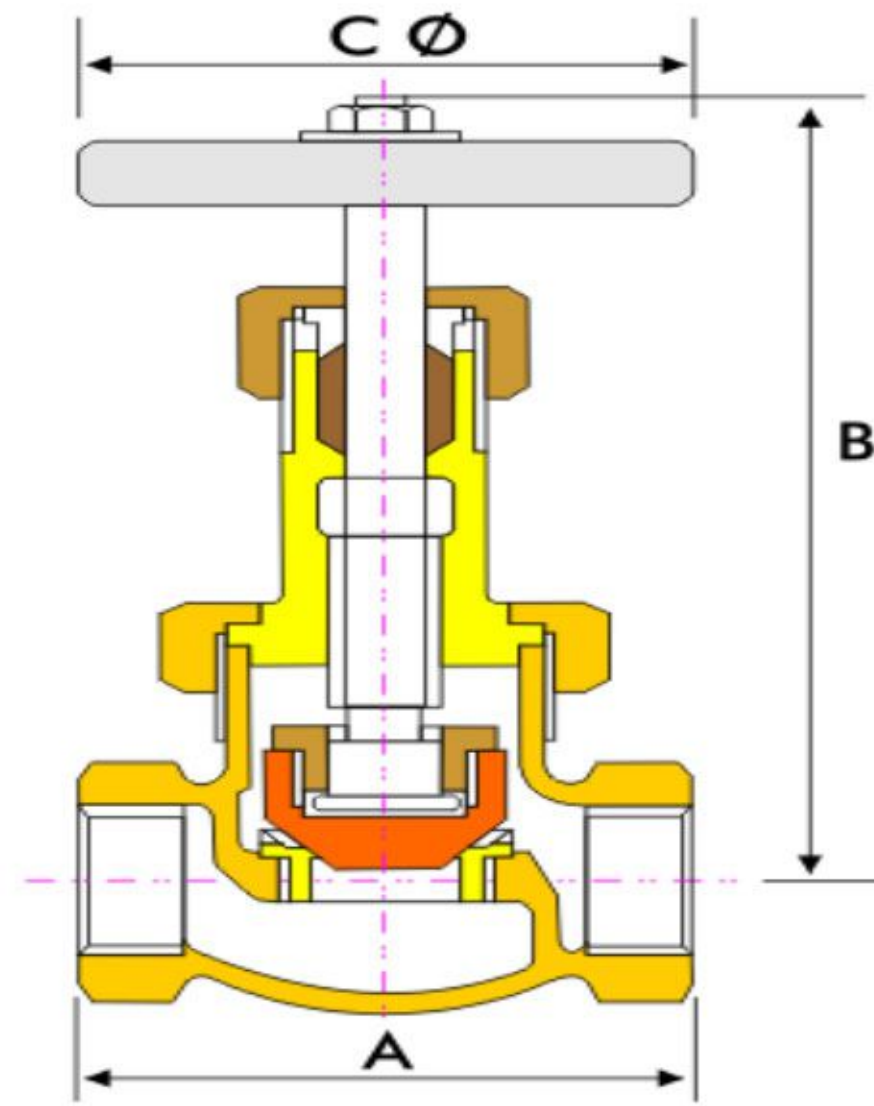

## SALIENT FEATURES

- ✓ Screwed Female Ends to IS : 554 BSP.
- ✓ AISI 410 working parts from extruded rods.
- ✓ Rising spindle, Screwed-On Bonnet.
- ✓ Smooth Handwheel operation.
- ✓ Renewable Seat and ring.
- ✓ High Quality Gland Packing suitable for Steam.
- ✓ Also Available in PTFE & Rubber Seat.
- ✓ Size Range from 15 mm to 50 mm.

**Cat. No. : AP-US09**

**Bronze  
Globe Valve No.-9  
Union Bonnet  
Screwed Ends**

