


DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2
mm	15	20	25	32	40	50
A	72	87	102	116	125	150
B	45	45	50	64	67	108

MATERIAL

Description	Material	Specifications
Union Nut	Leaded tin Bronze	IS : 318 Gr. LTB2
Union Cap	Leaded tin Bronze	IS : 318 Gr. LTB2
Disc	13% Cr. S.S.	ASTM A182 Gr.F6a/AISI-410
Body	Leaded tin Bronze	IS : 318 Gr. LTB2
Body Seat Ring	13% Cr. S.S.	ASTM A182 Gr.F6a/AISI-410

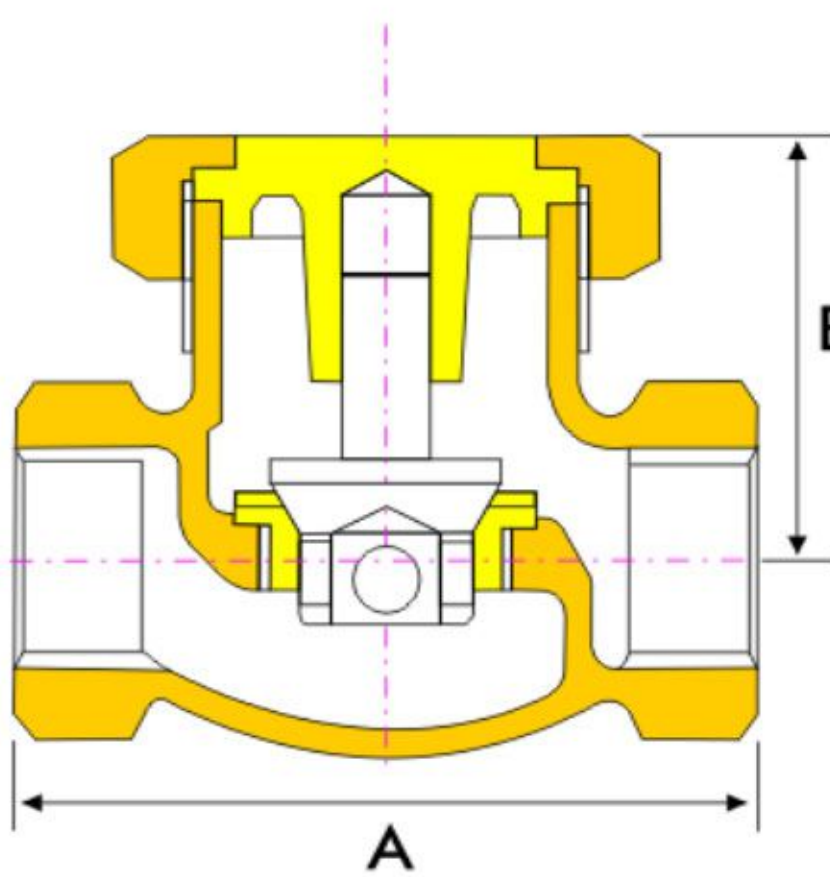

Test Pressure Hydraulic

Body : 300psi Seat : 100psi


Temp. Range : 10°C to 225°C

UTILITY

WATER	AIR	STEAM	OIL	GASES
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SALIENT FEATURES

- Screwed Female Ends to IS : 554 BSP. ✓
- AISI 410 working parts from extruded rods. ✓
- Screwed-On Bonnet. ✓
- Lift type Seat. ✓
- Renewable Seat and ring. ✓
- Uni-directional flow, for horizontal lines. ✓
- Also Available in PTFE & Rubber Seat. ✓
- Trouble free performance. ✓
- Size Range from 15 mm to 50 mm. ✓

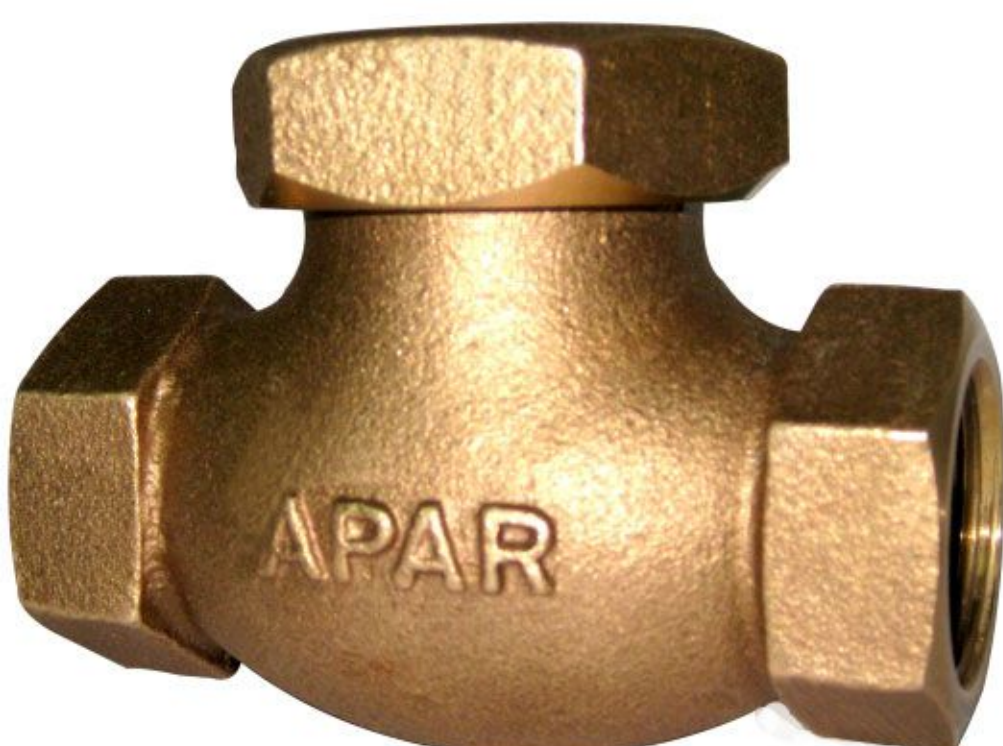

Cat. No. : AP-NUS11

**Bronze
Non Return Valve No.-9
Union Bonnet
Screwed Ends**