


**Cat. No. : AP-FLV14**

**Brass  
Float valve  
Screwed Ends**

**SALIENT FEATURES**

- Screwed Male End to IS:554, BSP ✓
- Superior quality rubber ✓  
seat and washers
- Forged and annealed rod ✓  
for better flexibility
- Suitable for both High ✓  
and Low pressure
- Trouble free performance ✓
- Size ranging from ✓  
15mm to 80mm

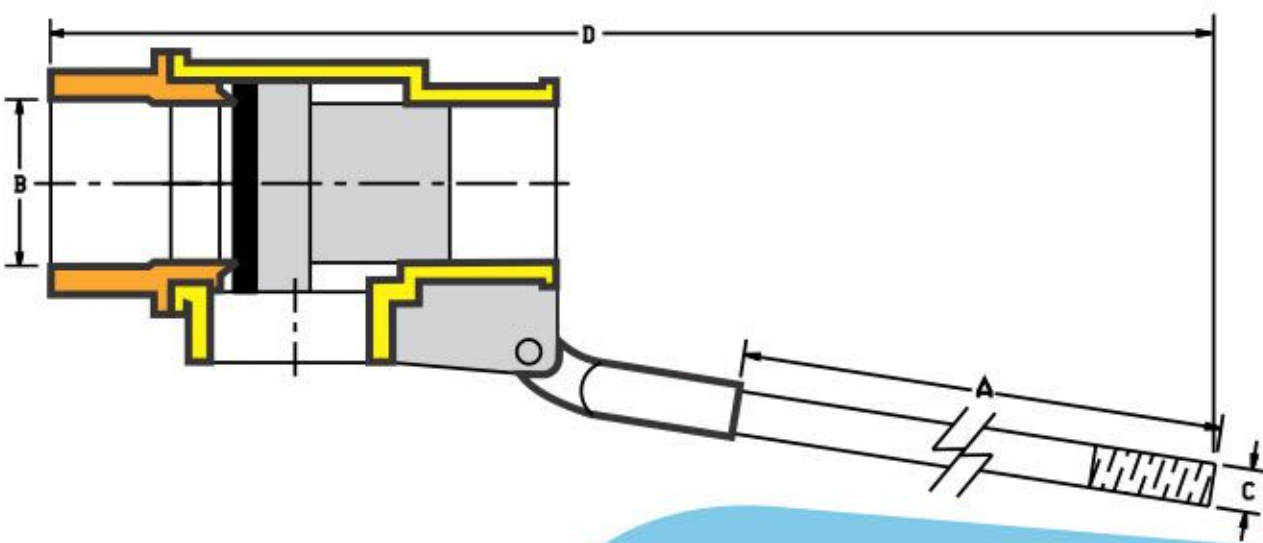

**UTILITY**

WATER	AIR	STEAM	OIL	GASES
✓	□	□	□	□

**Test Pressure Hydraulic**

Body : 1.5 Mpa      Seat : 1.0 Mpa

Temp. Range : 10°C to 225°C

**DIMENSIONS**

<b>Inches</b>	1/2	3/4	1	1 <sup>1/4</sup>	1 <sup>1/2</sup>	2
<b>mm</b>	15	20	25	32	40	50
<b>A</b>	205	205	245	370	415	415
<b>B</b>	15	19	25	35	39	51
<b>C</b>	7.2	7.2	7.2	9.2	9.2	9.2
<b>D</b>	275	275	320	480	540	556

**MATERIAL**

Description	Material	Specifications
Body	Brass	IS 319
Lever	Brass	IS 319
Check Nut	Brass	IS 319
Piston	Brass	IS 319
Body Connector	Brass	IS 319
Seat	Synthetic Rubber	IS 5192
Rod	Brass	IS 6912 FLB
Hinge & Hardware	Brass	IS 319
Washers	Synthetic Rubber	IS 5192