


Cat. No. : AP-WS03



IS:778

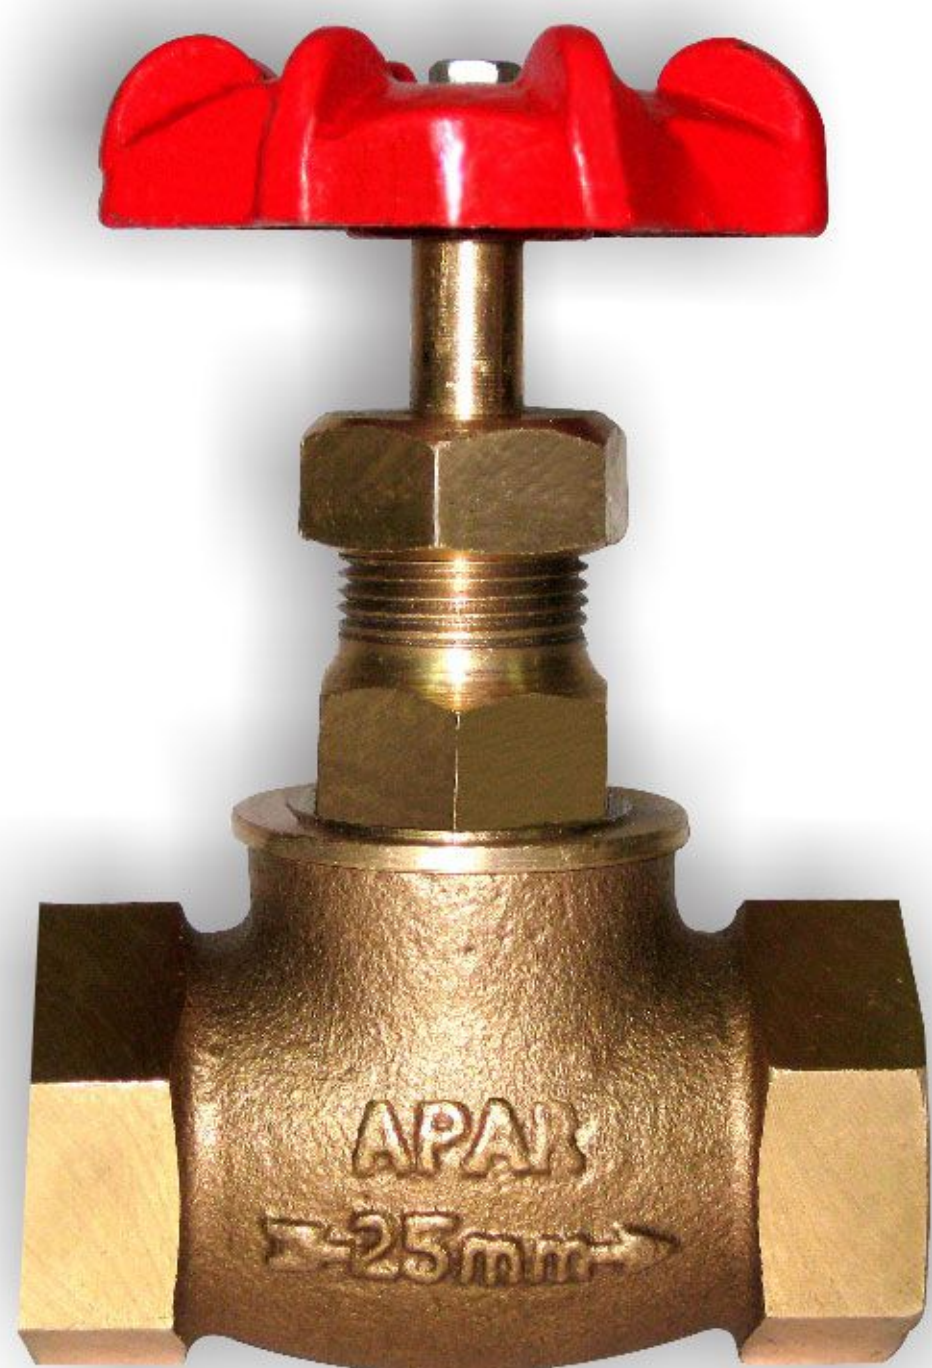


Marked

**Gun Metal
Globe Valve
Screwed Ends**

SALIENT FEATURES

- Screwed Female Ends to ✓
IS : 554 BSP.
- Smooth Handwheel operation. ✓
- Strictly conforming to ✓
IS : 778 Class I.
- Rising Stem & Screwed ✓
- in Bonnet.
- Back Seat Arrangement. ✓
- Trouble free performance. ✓
- Size Range from 15 mm ✓
to 100 mm.

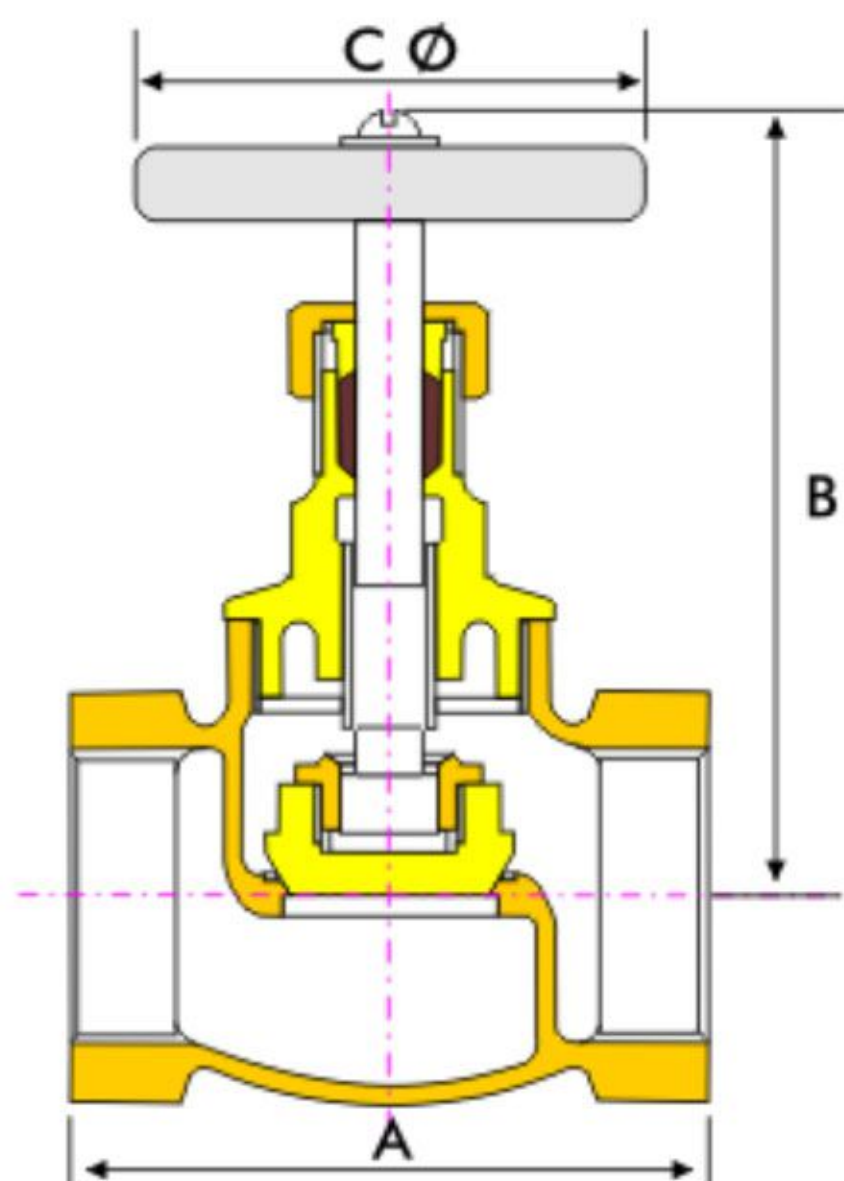

UTILITY				
WATER	AIR	STEAM	OIL	GASES
✓	□	□	✓	□

Test Pressure Hydraulic
 Body : 1.5 Mpa Seat : 1.0 Mpa
 Temp. Range : 10°C to 225°C

DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2	2 ^{1/2}	3	4
mm	15	20	25	32	40	50	65	80	100
A	60	70	80	95	110	125	160	180	216
B	87	92	97	116	131	144	165	186	203
C	59	59	68	83	91	99	108	126	161

MATERIAL

Description	Material	Specifications
Set Screw	M.S.	IS : 1367
Washer	M.S.	IS : 226
handwheel	C.I.	IS : 210 Gr. FG200
Stem	Brass	IS : 6912 Gr. Flb
Gland, Gland Nut	G.M.	LTB2 of IS : 318
Bonnet	G.M.	LTB2 of IS : 318
Body	G.M.	LTB2 of IS : 318
Disc Nut, Disc	G.M.	LTB2 of IS : 318
Gland Packing	Asbestos	IS : 4687