

DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2	2 ^{1/2}	3	4
mm	15	20	25	32	40	50	65	80	100
A	65	70	75	85	95	110	130	145	190
B	26	32	39	49	55	68	85	98	127


MATERIAL

Description	Material	Specifications
Seat	Bronze	IS : 318 Gr. LTB2
Body	Bronze	IS : 318 Gr. LTB2
O-Ring	Synthetic Rubber	IS : 5192
Spring	Ph. Bronze	IS : 7608
Washer	Brass	IS : 6912
Nut	Brass	IS : 6912

Test Pressure Hydraulic

Body : 300psi Seat : 100psi

Temp. Range : 10°C to 225°C

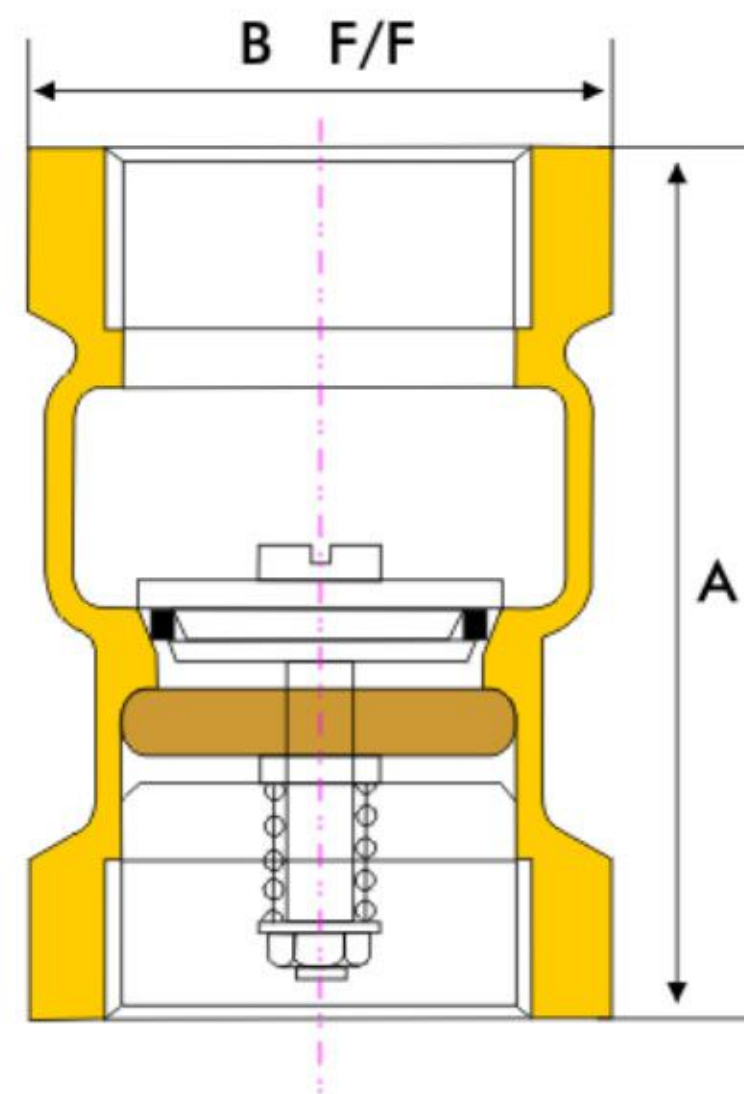

WATER AIR **UTILITY** OIL GASES



SALIENT FEATURES

- ✓ Screwed Female Ends to IS : 554 BSP.
- ✓ Strictly conforming to IS : 778 Class I.
- ✓ For use on Vertical lines only.
- ✓ Spring operated Lift type
- ✓ Seat with rubber ring.
- ✓ Uni-directional flow.
- ✓ Trouble free performance.
- ✓ Size Range from 15 mm to 100 mm.

IS:778



Marked

Cat. No. : AP-CV03

**Gun Metal
Check Valve Vertical
Screwed Ends**



APAR®