


DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2	2 ^{1/2}	3	4
mm	15	20	25	32	40	50	65	80	100
A	60	70	80	95	110	125	160	180	216
B	36	43	52	56	69	72	82	90	122

MATERIAL

Description	Material	Specifications
Bonnet	Bronze	IS : 318 Gr. LTB2
Body	Bronze	IS : 318 Gr. LTB2
Disc	Bronze	IS : 318 Gr. LTB2

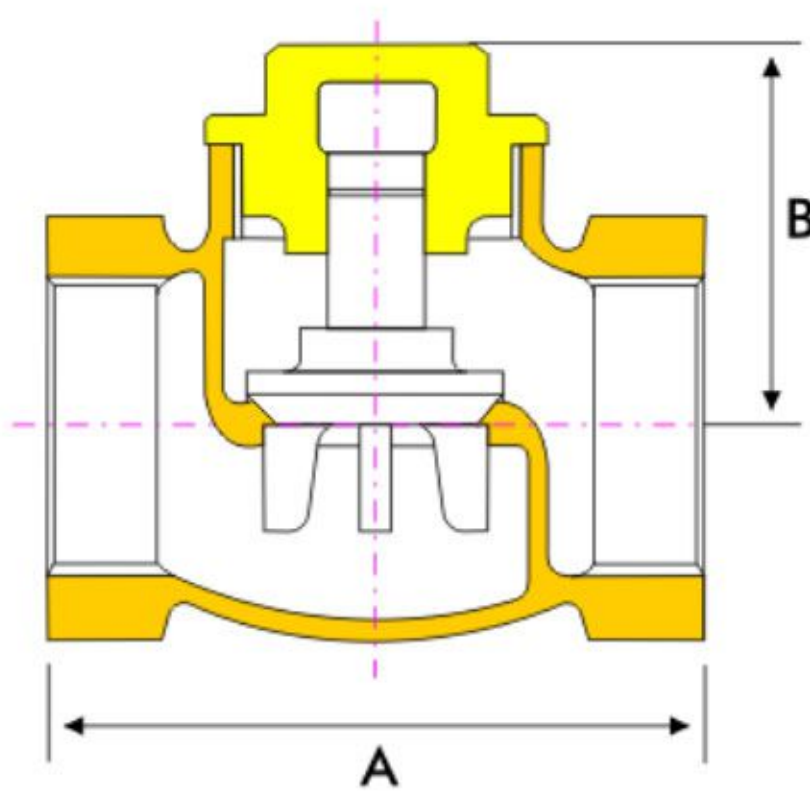

Test Pressure Hydraulic

Body : 300psi Seat : 100psi

Temp. Range : 10°C to 225°C

UTILITY

WATER	AIR	STEAM	OIL	GASES
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

IS:778



Marked

SALIENT FEATURES

- Screwed Female Ends to IS : 554 BSP. ✓
- Strictly conforming to IS : 778 Class I. ✓
- Screwed in Bonnet. ✓
- Lift type Seat. ✓
- Uni-directional flow, for horizontal lines. ✓
- Trouble free performance. ✓
- Size Range from 15 mm to 100 mm. ✓



Cat. No. : AP-NS04

**Gun Metal
Check Valve Horizontal
Screwed Ends**