

Cat. No. : AP-CVP05

**Gun Metal
Check Valve Vertical
Plunger Type
Screwed Ends**


SALIENT FEATURES

- ✓ Screwed Female Ends to IS : 554 BSP.
- ✓ For Use in vertical Lines only
- ✓ Double guided metal to metal seating.
- ✓ Uni-directional flow.
- ✓ Without spring, works efficiently on low pressure.
- ✓ Trouble free performance.
- ✓ Size Range from 15 mm to 50 mm.



UTILITY				
WATER	AIR	STEAM	OIL	GASES
✓	□	□	□	□

Test Pressure Hydraulic	
Body : 300psi	Seat : 100psi
Temp. Range : 10°C to 225°C	

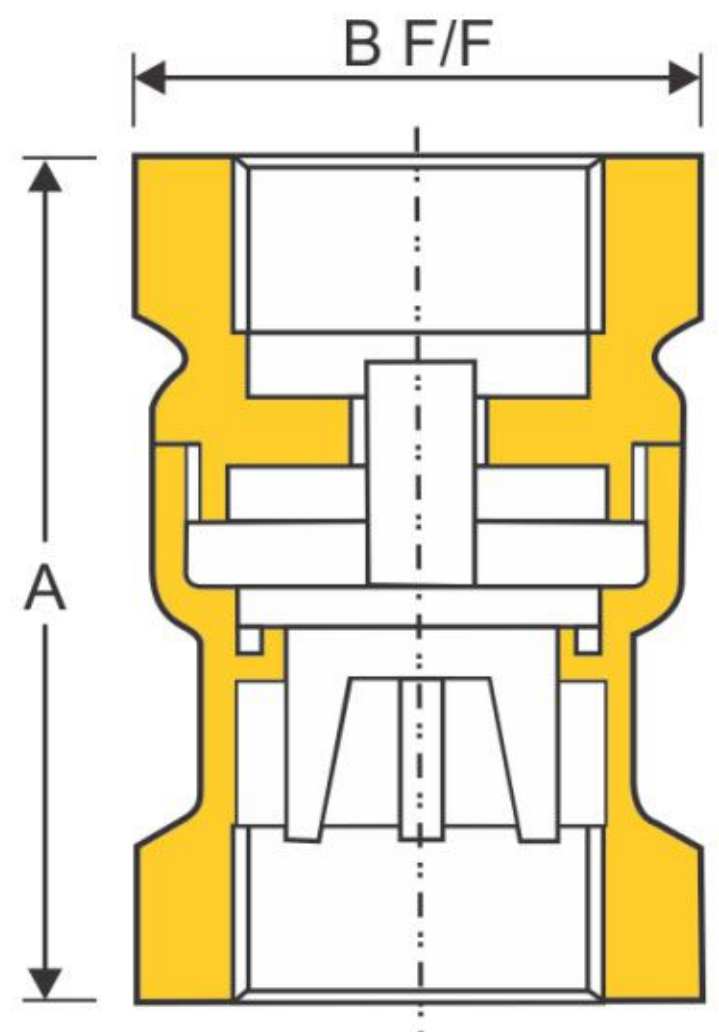

DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2
mm	15	20	25	32	40	50
A	69	75	80	89	96	116
B	27	33	40	50	56	69

MATERIAL

Description	Material	Specifications
Body	G.M.	IS : 318 Gr. LTB2
Disc	G.M.	IS : 318 Gr. LTB2
Bonnet	G.M.	IS : 318 Gr. LTB2