


Cat. No. : AP-FV06

**Gun Metal
Foot Valve
Screwed Ends**



SALIENT FEATURES

- Screwed Female End to IS : 554 BSP. ✓
- Metal to metal lift type Valve. ✓
- Operates even at low pressure. ✓
- Valve also available with rubber ring, spring loaded. ✓
- Filter water efficiently. ✓
- Trouble free performance. ✓
- Size Range from 15mm to 100mm. ✓

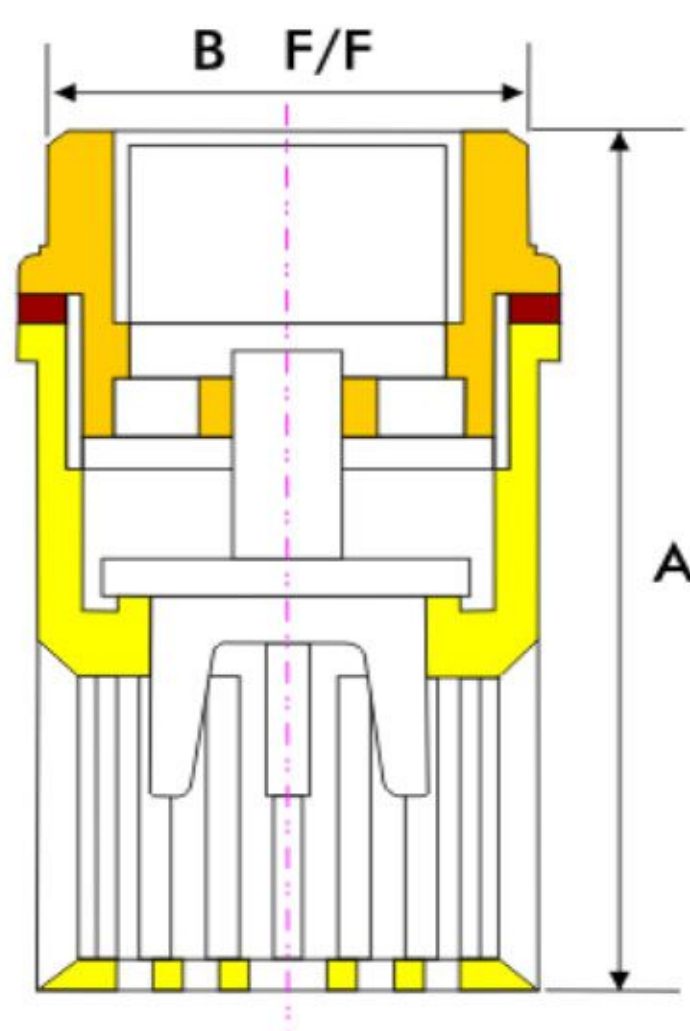

UTILITY

WATER	AIR	STEAM	OIL	GASES
✓	□	□	□	□

Test Pressure Hydraulic

Seat : 100 psi

Temp. Range : 10°C to 225°C

DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2	2 ^{1/2}	3	4
mm	15	20	25	32	40	50	65	80	100
A	66	67	76	81	88	103	125	135	149
B	27	32	38	47	55	66	82	97	121

MATERIAL

Description	Material	Specifications
Body	G.M.	IS : 318 Gr. LTB2
Gasket	Synthetic Rubber	IS : 5192
Disc	G.M.	IS : 318 Gr. LTB2
Strainer	G.M.	IS : 318 Gr. LTB2