

## DIMENSIONS

Inches	1/2	3/4	1	1 <sup>1/4</sup>	1 <sup>1/2</sup>	2	2 <sup>1/2</sup>	3	4
mm	15	20	25	32	40	50	65	80	100
A	60	62	71	85	105	122	135	160	195
B	55	60	65	79	87	97	135	145	168
C	92	112	131	142	159	175	217	217	272

## MATERIAL


Description	Material	Specifications
Lever Nut	M.S.	IS : 1367
Gland	Brass	IS : 6912 Gr. FLB
Gland Packing	Asbestos	IS : 4687
Body	Bronze	IS : 318 Gr. LTB2
Ball Seals	P.T.F.E.	---
Ball	S.S.	AISI 304
Stem	13% Cr. S.S.	AISI 410
Body Connector	Bronze	IS : 318 Gr. LTB2
Lever	M.S.	IS : 226 with PVC Sleeve

### Test Pressure Hydraulic

Body & Seat: 500psi

Temp. Range : 10°C to 225°C

UTILITY				
WATER	AIR	STEAM	OIL	GASES
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

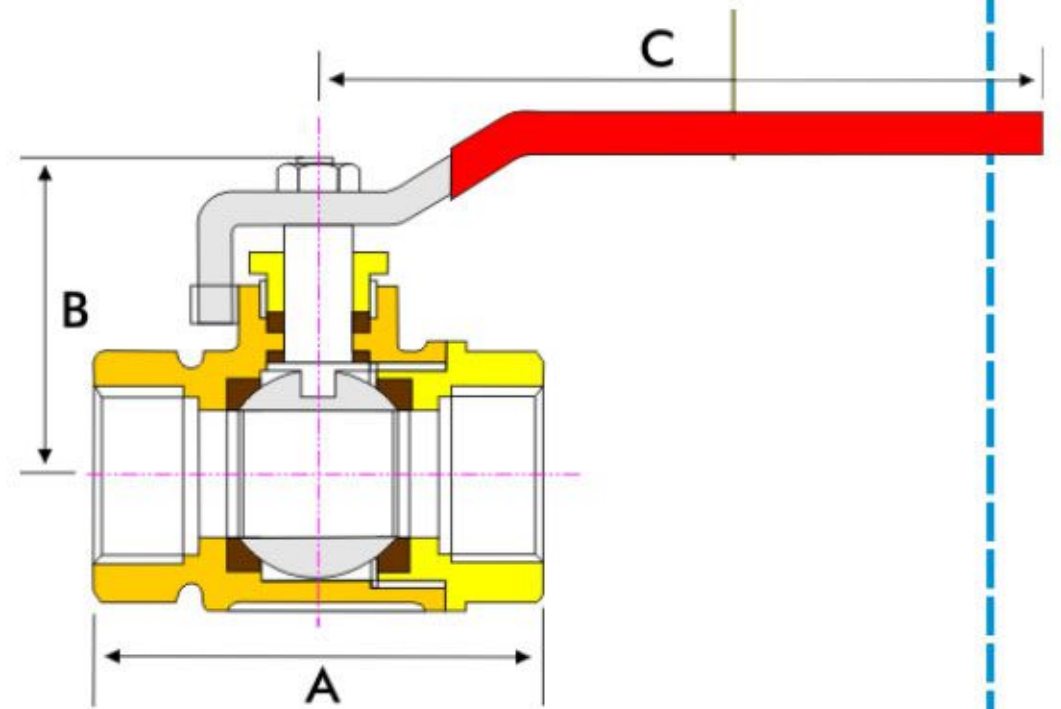


## SALIENT FEATURES

- ✓ Screwed Female Ends to IS : 554 BSP.
- ✓ Quarter turn, smooth lever operation.
- ✓ AISI 304 Ball (Brass optional).
- ✓ AISI 410 blow-out proof stem.
- ✓ Best quality P.T.F.E. seating & asbestos packing.
- ✓ Trouble free performance.
- ✓ Size Range from 15 mm to 100 mm.

**Cat. No. : AP-BS07**

**Bronze  
Ball Valve  
Screwed Ends**

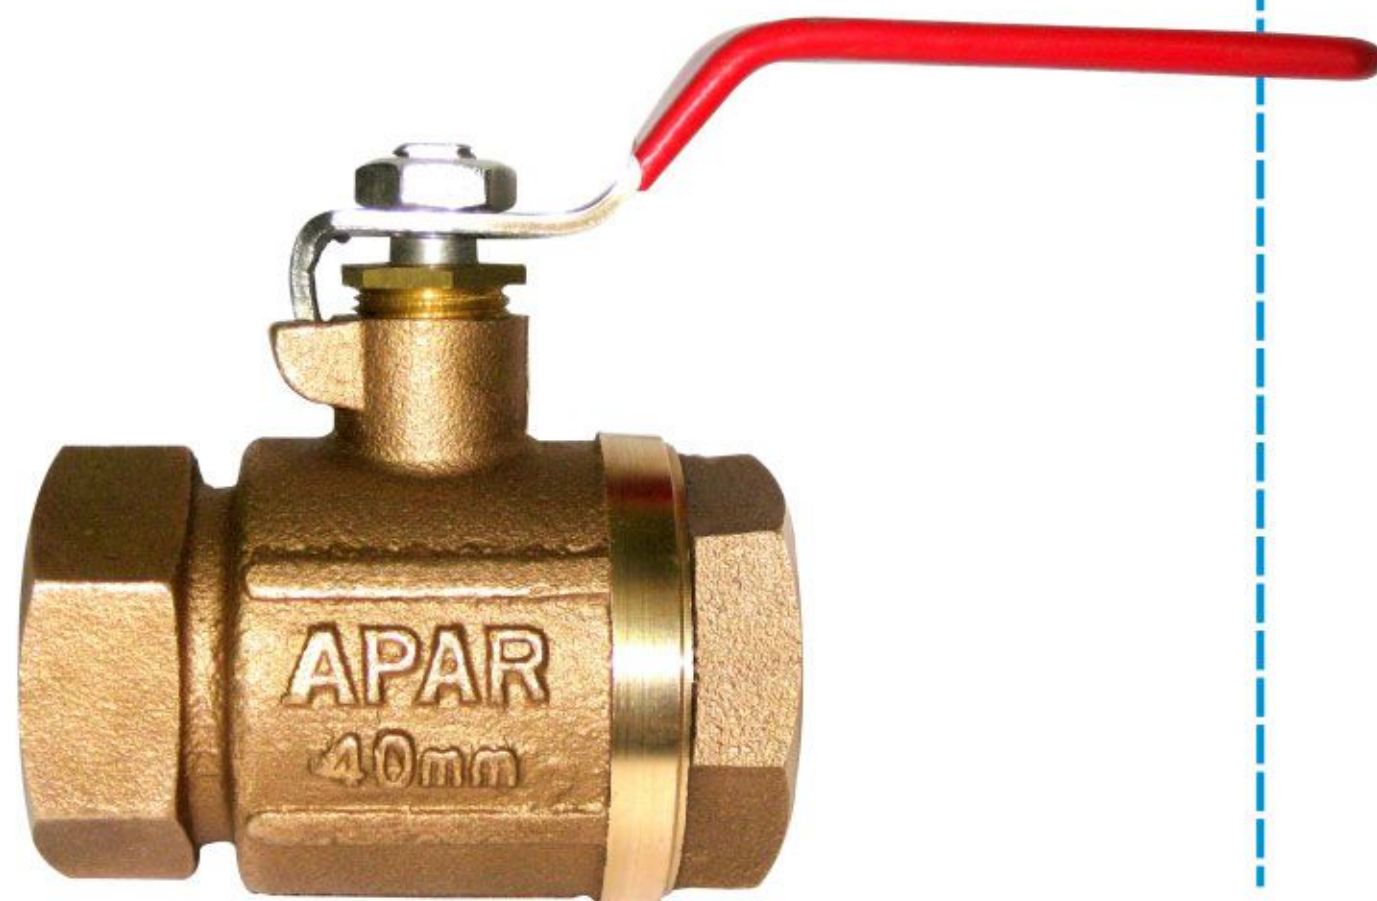

**APAR®**