

Cat. No. : AP-SV09B

**Brass
Swing Check Valve
Screwed Ends**

SALIENT FEATURES

- ✓ Screwed Female Ends to IS : 554 BSP.
- ✓ Screwed-in Bonnet.
- ✓ Metal to metal seating.
- ✓ Uni-directional flow.
- ✓ For use on Horizontal as well as Vertical lines.
- ✓ Trouble free performance.
- ✓ Size Range from 15 mm to 50 mm.




UTILITY				
WATER	AIR	STEAM	OIL	GASES
✓	□	□	□	□

Test Pressure Hydraulic

Body : 300psi Seat : 100psi

Temp. Range : 10°C to 225°C

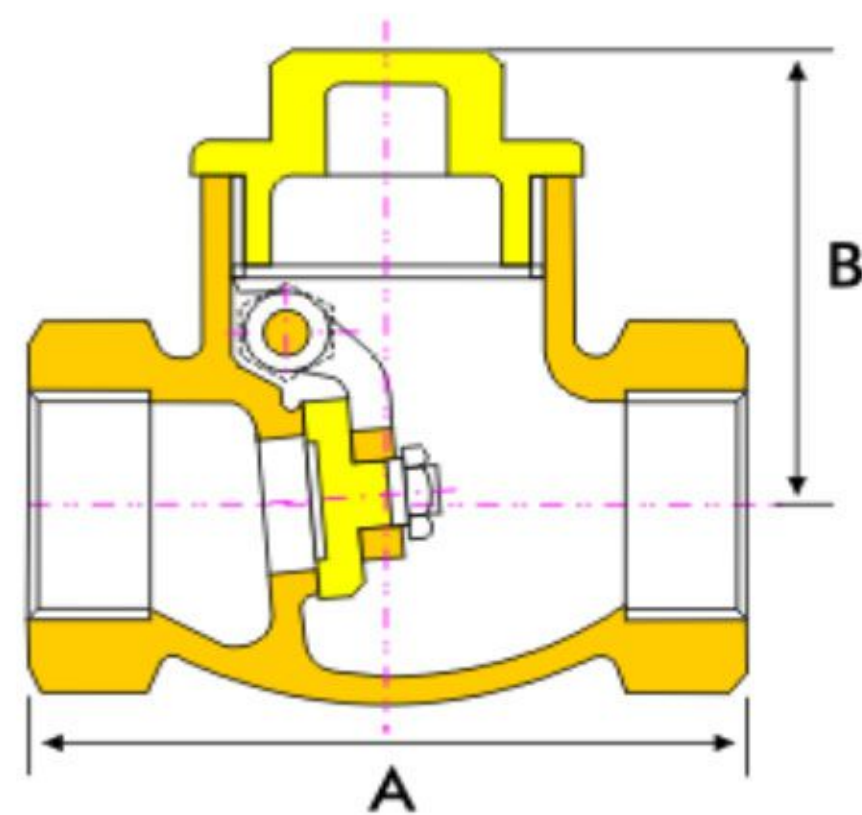

DIMENSIONS

Inches	1/2	3/4	1	1 ^{1/4}	1 ^{1/2}	2
mm	15	20	25	32	40	50
A	65	75	95	105	121	150
B	45	54	67	82	85	75

MATERIAL

Description	Material	Specifications
Cover	G.M.	IS : 318 Gr. LTB2
Body	G.M.	IS : 318 Gr. LTB2
Hinge Pin	Brass	IS : 6912 Gr. FHTB1
Disc	G.M.	IS : 318 Gr. LTB2
Hinge	G.M.	IS : 318 Gr. LTB2
Nut	Brass	IS : 6912 Gr. FHTB1
Side Plug	Brass	IS : 6912 Gr. FHTB1