

Aurum[®]


**Gun Metal
Gate Valve
Split Wedge Type
Tanker Valve**

Cat. No.: AU-TV27

Test Pressure Hydraulic

Body: 1.5Mpa Seat: 1.0 Mpa

Temp. Range : 10°c to 225°c

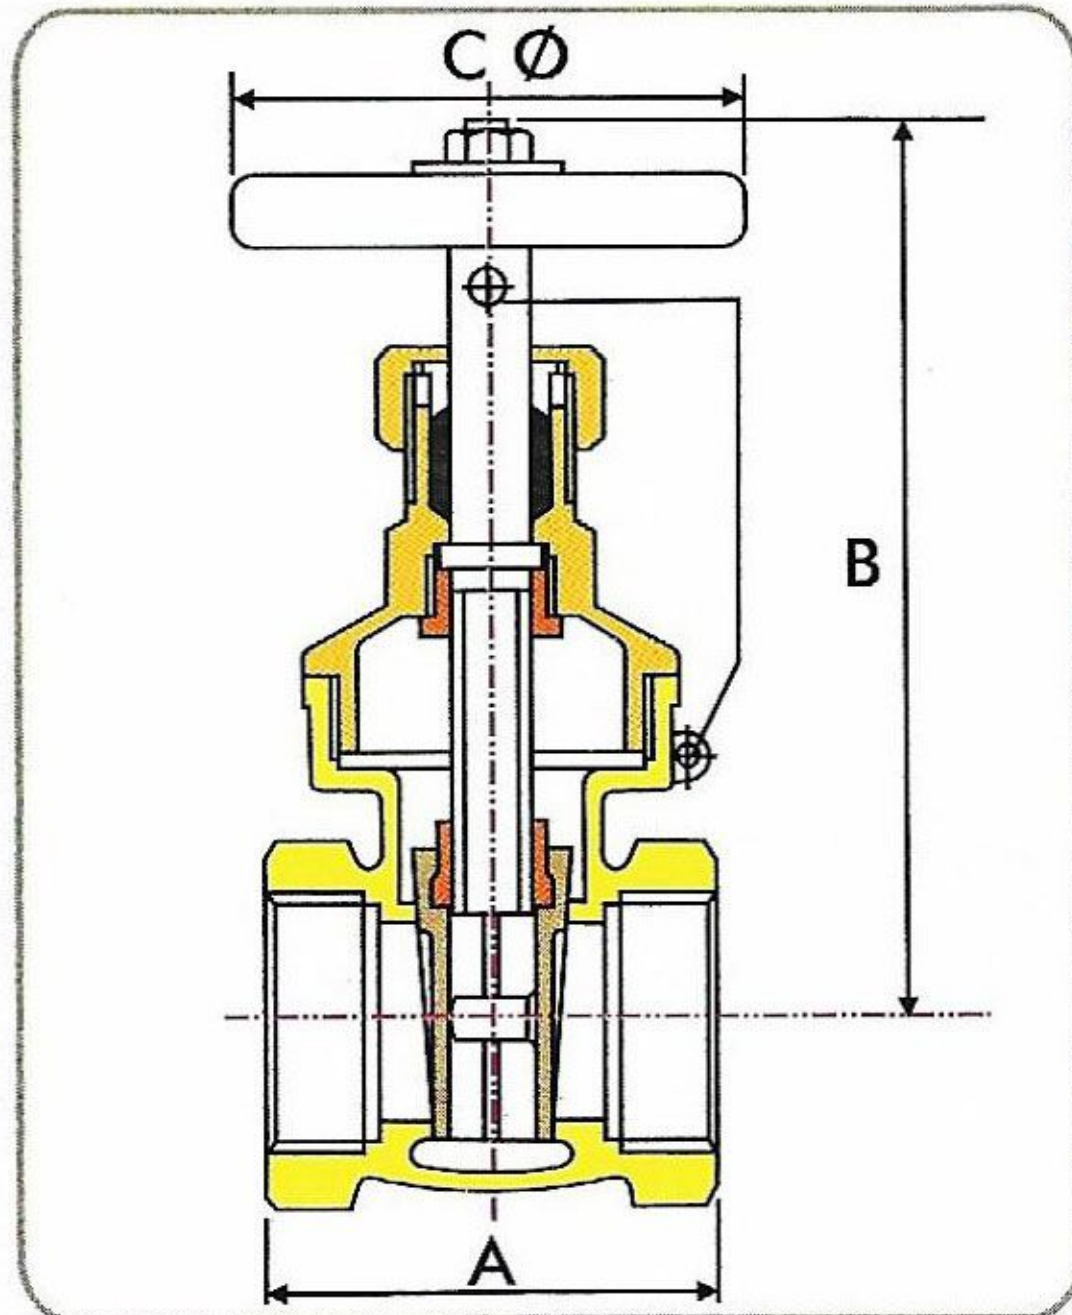

SALIENT FEATURES :

- ✓ Screwed Female Ends to IS 554 BSP.
- ✓ Smooth Handwheel operation.
- ✓ Non-rising Stem & Screwed-in Bonnet.
- ✓ Back Seat Arrangement.
- ✓ Split type 2 pc. Seat for air tight seating with body.
- ✓ Locking facility provided to lock handwheel.
- ✓ Specially designed for oil, diesel & petrol tankers.
- ✓ Size Range 65mm & 80mm.

UTILITY

WATER	AIR	STEAM	OIL	GASES
✓	□	□	✓	□

IS:778



Marked



DIMENSIONS

Inches	mm	A	B	C
2½	65	90	215	110
3	80	98	235	132

MATERIAL :

Description	Material	Specifications
Nut	M.S.	IS : 1367
Washer	M.S.	IS : 226
Handwheel	C.I.	IS : 210 Gr. FG200
Stem	Brass	LTB2 of IS:318
Gland, Gland Nut	Bronze	LTB2 of IS:318
Bonnet, Body	Bronze	LTB2 of IS:318
Stem Check Nut	Bronze	LTB2 of IS:318
Wedge & Wedge Nut	Bronze	LTB2 of IS:318
Gland Packing	Asbestos	IS:4687